




CFR ENDLAP ASSEMBLY GAUGE

TECHNICAL BULLETIN
Vol. 2, No. 6
APRIL, 2004

CFR-42 Endlap Assembly Gauge

One of the most commonly observed erection errors on CFR jobs has been the incorrect placement of the sealants and fasteners at the panel end lap. This is one of the most critical details of any metal roof system especially in low slope applications. An assembly gauge has been developed to simplify the location and placement of the sealant and fasteners. This gauge has now been incorporated into the installation details of the CFR42 panel.

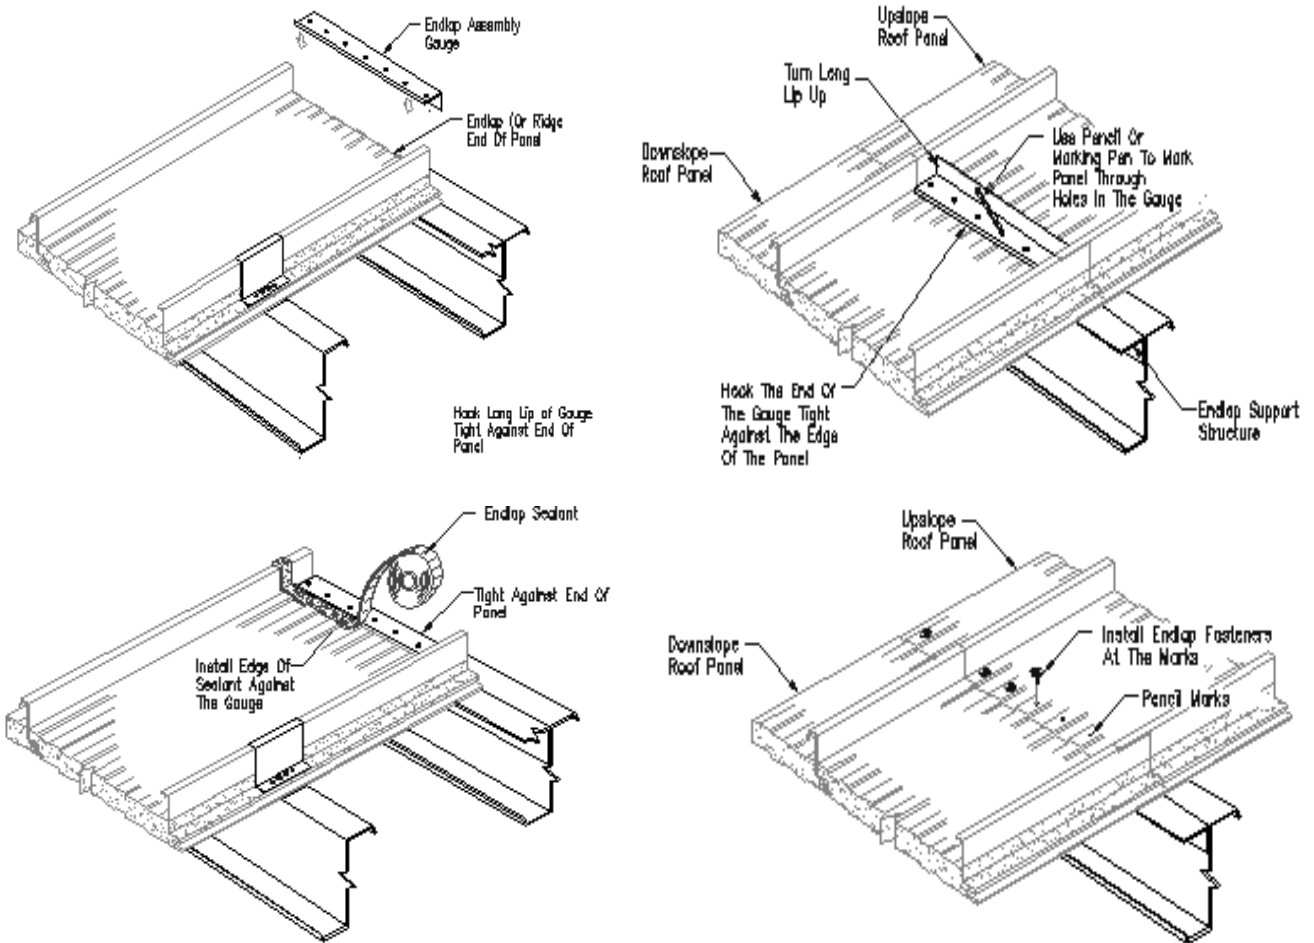



METL-SPAN

1720 LAKEPOINTE DRIVE, SUITE 101

LEWISVILLE, TX 75057

877.585.9969

INFO@METLSPAN.COM

www.metlspan.com

© 2019 Metl-Span, part of the Cornerstone Building Brands family. All Rights Reserved.

