


* $\frac{1}{8}$ " ϕ POP RIVET @ 3'-0" O.C. MAX.
REQUIRED ON FIRE SIDE OF PANELS.
(#6-20 X $\frac{3}{8}$ " SELF DRILLER CAN BE
USED AS AN ALTERNATIVE FASTENER)

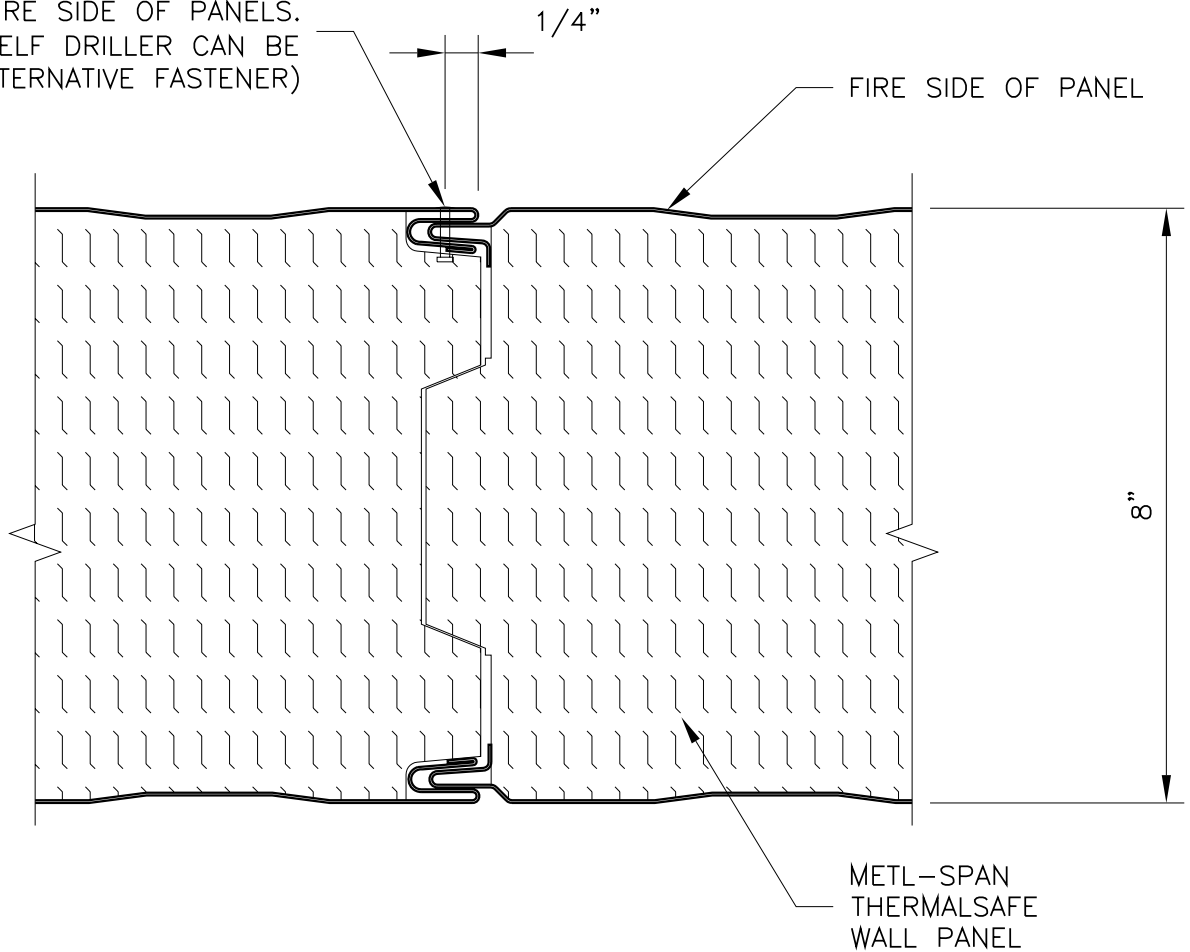

PANEL JOINT FASTENING

***IMPORTANT:**
REQUIRED ONLY ON THE FIRE SIDES OF 3 HR. FIRE
RESISTANCE RATED 8" THICK THERMALSAFE PANELS

COMMERCIAL AND
INDUSTRIAL

3 HR. FIRE RATING JOINT FASTENING
8" THERMALSAFE PANEL

TSW10001
DATE: 02-07-2014