




COLORS & COATINGS

Cold Storage Market Insulated Metal Panels

All Metl-Span colors are formulated to provide premium energy efficiency solar reflectivity.

STANDARD I EXTERIOR COLORS


Full-Strength 70% PVDF Fluoropolymer Coating



POLAR WHITE**
E: 0.86 SRI: 27




SANDSTONE**
E: 0.86 SRI: 25



ALMOND**
E: 0.86 SRI: 26



BROWNSTONE*
E: 0.86 SRI: 27



REGAL GRAY**
E: 0.86 SRI: 25

PREMIUM I EXTERIOR COLORS

Full-Strength 70% PVDF Fluoropolymer Coating




TUNDRA*
E: 0.86 SRI: 27



SPRUCE*
E: 0.86 SRI: 25




AEGEAN BLUE*
E: 0.86 SRI: 26



IGLOO WHITE*
E: 0.86 SRI: 26

STANDARD WEATHERXL® EXTERIOR COLORS

Siliconized Polyester



WINTER WHITE**
E: 0.86 SRI: 27



LIGHT STONE**
E: 0.86 SRI: 25



ASH GRAY*
E: 0.86 SRI: 26

Igloo White is the standard interior color for all panels

For color suitability, testing codes data and pricing, contact your local representative or visit metlspan.com for more information.

Pricing varies depending on colors, quantity and gauge. All colors shown are approximate to actual finish colors.


Color warranties vary based upon color. Contact Metl-Span for full warranty information. Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metl-Span reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at metlspan.com.

*US Department of Agriculture (USDA) Compliant

STANDARD II EXTERIOR COLORS

POLYESTER EXTERIOR COLOR

COLOR SYSTEMS

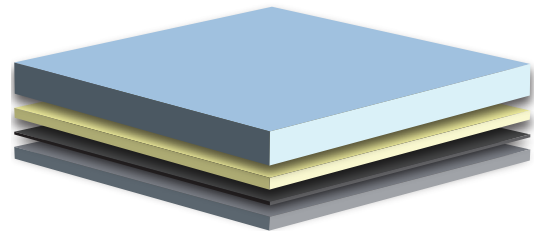

Fluropon®, WeatherXL® and Polyester Systems:

1. 0.75 mil nominal Top Color Coat
2. 0.25 mil nominal Primer
3. Metal Substrate



★ ENERGY STAR® Qualified