



**METL-SPAN®**  
INSULATED METAL PANELS

**NOTE:**  
THESE DETAILS ARE FOR INSTALLATION AND SEALING OF BW UNIVERSAL SYSTEM PANELS ONLY. FOR INSTALLATION AND SEALING REQUIRED FOR CLADDING, SEE STANDARD DETAILS FOR SPECIFIC CLADDING.

\*EQUAL SPACINGS TO BE 12" MIN./24" MAX. FINAL SPACINGS PER WIND LOAD REQUIREMENTS. CONTACT METL-SPAN'S ENGINEERING DEPARTMENT.

METAL COPING, WOOD BLOCKING, OTHER COPING SUPPORT MEMBERS AND FORM OF ATTACHMENTS (NOT BY PANEL MANUFACTURER)

EXTEND AIR BARRIER TO PROVIDE SHEATHING AND WATER PROTECTION (NOT BY PANEL MANUFACTURER)

CONTINUOUS NON-CURING BUTYL SEALANT W/ MARRIAGE BEAD TO PANEL JOINT SEALANT

THROUGH-FASTENER INTO PANEL JOINTS TO SUPPORTS

CLIP FASTENER INTO BWS VERTICAL PANEL JOINT CLIP TO SUPPORTS

BWS VERTICAL PANEL JOINT CLIP

CORNER TRIM


STEEL STUD 18 GA. MIN. (NOT BY PANEL MANUFACTURER)

HORIZONTAL CLADDING (BY CLADDING MANUFACTURER)

FASTENER (BY CLADDING MANUFACTURER)

BW STRETCH SYSTEM PANEL

VERTICAL 1 1/2" SUBGIRT AND AIR CAVITY (OPTIONAL)

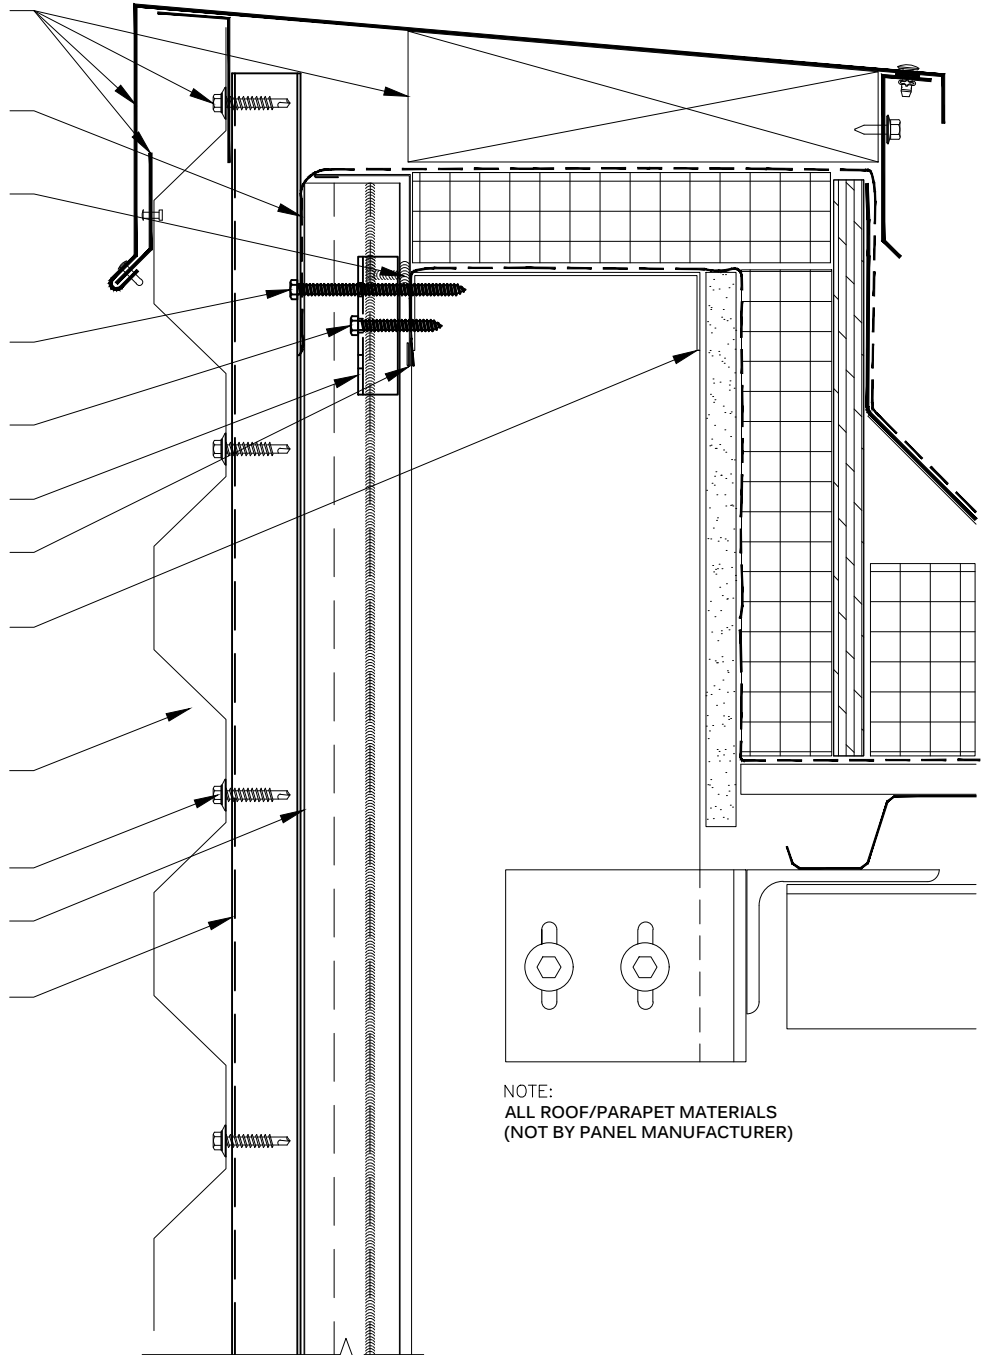

**NOTE:**  
ALL ROOF/PARAPET MATERIALS (NOT BY PANEL MANUFACTURER)

**VERTICAL PANEL JOINT CLIP  
PARAPET - w/ VERTICAL SUBGIRT  
BW STRETCH SYSTEM™**

DRAWING NO:

**BWS-VPJC-VS-PT-01**

DATE:

Mar '20

REV:

00