

NOTE:


THESE DETAILS ARE FOR INSTALLATION AND SEALING OF BW UNIVERSAL SYSTEM PANELS ONLY. FOR INSTALLATION AND SEALING REQUIRED FOR CLADDING, SEE STANDARD DETAILS FOR SPECIFIC CLADDING.

*EQUAL SPACINGS TO BE 12" MIN./24" MAX. FINAL SPACINGS PER WIND LOAD REQUIREMENTS. CONTACT METL-SPAN'S ENGINEERING DEPARTMENT.

VERTICAL BW STRETCH SYSTEM PANEL W/CLIPS

VERTICAL OVER HORIZONTAL STRUCTURAL STEEL SUPPORTS

THE CONFIGURATION BELOW IS TO BE USED FOR ATTACHMENT TO STRUCTURAL STEEL, WHERE THE SPANNING STRENGTH OF THE VERTICAL BW STRETCH SYSTEM PANEL PERFORMS AS A VAPOR BARRIER, INSULATION AND PROTECTED OUTER WATER BARRIER SHEET THAT ACTS AS A FASTENING MEDIUM FOR ATTACHMENT OF EXTERIOR PANEL SYSTEMS.

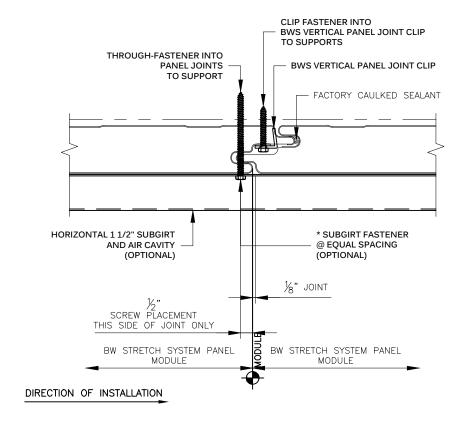

VERTICAL BW STRETCH SYSTEM PANEL JOINT

VERTICAL PANEL JOINT CLIP
PANEL JOINT - w/ HORIZONTAL SUBGIRT
BW STRETCH SYSTEMTM

DRAWING NO

BWS-VPJC-HS-PJ-01

DATE:

Mar '20

00