


NOTE:

THESE DETAILS ARE FOR INSTALLATION AND SEALING OF BW UNIVERSAL SYSTEM PANELS ONLY. FOR INSTALLATION AND SEALING REQUIRED FOR CLADDING, SEE STANDARD DETAILS FOR SPECIFIC CLADDING.

*EQUAL SPACINGS TO BE 12" MIN./24" MAX. FINAL SPACINGS PER WIND LOAD REQUIREMENTS. CONTACT METL-SPAN'S ENGINEERING DEPARTMENT.

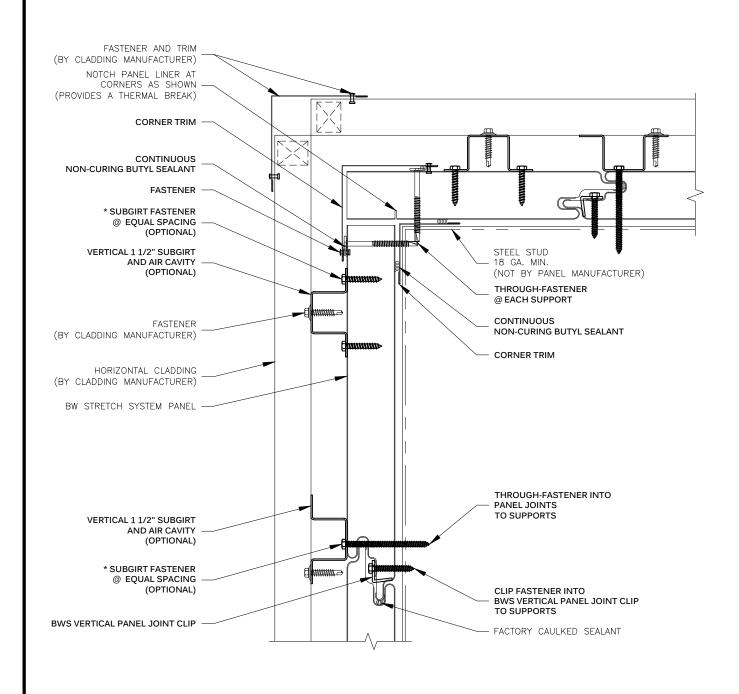

VERTICAL PANEL JOINT CLIP OUTSIDE CORNER - w/ VERTICAL SUBGIRT BW STRETCH SYSTEMTM DRAWING NO:

BWS-VPJC-VS-CE-01

DATE:

00

Mar '20

00