


CF ARCHITECTURAL HORIZONTAL INSULATED METAL WALL PANEL WITH PUR FOAM CORE



The Metl-Span CF Architectural horizontal insulated metal panel offers a sleek, monolithic look. These wall panels are designed to be installed horizontally and are available with a range of reveals. The CF Architectural panels provide a beautiful, flush appearance, allowing architects design flexibility.

JOINT INTERSECTION

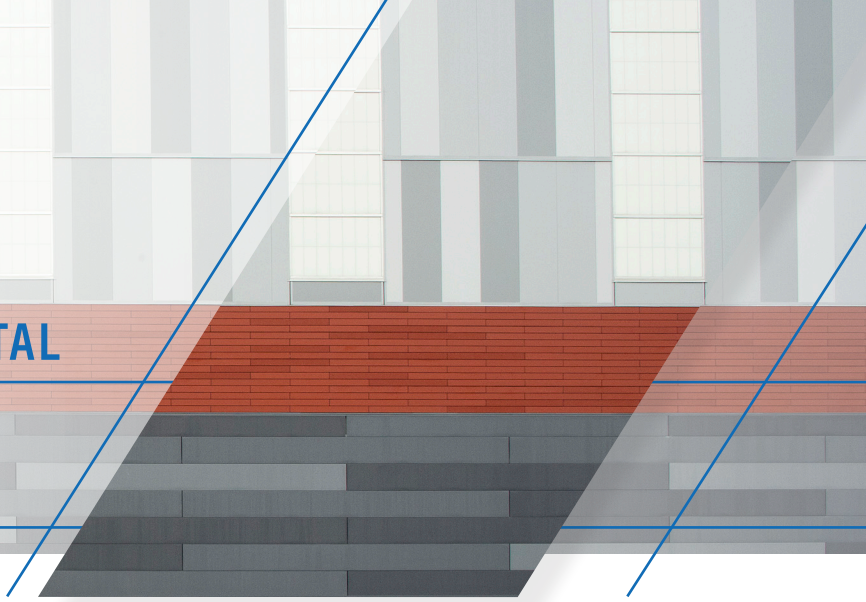


INTEGRATED WINDOW



REVEALS



PANEL PROFILE



PRODUCT SPECIFICATIONS

- WIDTH** • 24", 30", 36"
- THICKNESS** • 2", 2½", 3", 4"
- LENGTH** NON-DIRECTIONAL EMBOSSED
8'-0" to 32'-0"
- UNEMBOSSED
8'-0" to 16'-0"
- EXTERIOR PROFILE** • Flat appearance providing a monolithic look, embossed or unembossed
- EXTERIOR FACE** • G-90 galvanized or AZ-50 aluminum-zinc coated steel in 22 Ga.
- INTERIOR PROFILE** • Light Mesa, nominal ¼" deep, embossed or unembossed

- INTERIOR FACE** • G-90 galvanized, or AZ-50 aluminum-zinc coated steel in 26, 24 and 22 Ga.

- CORE** • Foamed-in-place, PUR Foam Core, zero ozone depleting (zero ODP) Class 1 foam

- JOINT** • Offset double tongue-and-groove with extended metal shelf for positive face fastening

- REVEAL** • Up to 1" reveal options in ¼" increments or up to 3" reveal options in ½" increments

U-FACTOR (BTU/h-ft²·°F)*

PANEL WIDTH: 36"

| | 35° |
|------|-------|
| 2" | 0.059 |
| 2.5" | 0.046 |
| 3" | 0.038 |
| 4" | 0.028 |

R-VALUE (h-ft²·°F/BTU)*

PANEL WIDTH: 36"

| | 35° |
|------|------|
| 2" | 17.5 |
| 2.5" | 21.9 |
| 3" | 26.2 |
| 4" | 35.0 |

DESIGN FEATURES & BENEFITS

- Available in custom widths
- Available with preformed corners
- Flat, flush appearance for vertical or horizontal installation
- Utilizes concealed clips and eliminates thermal short circuits
- Easy and fast installation, with reduced construction labor costs
- Interior and exterior applications
- Can be used in conjunction with other Metl-Span joint profiles

*Based on ASTM C518, ASTM C1363 and thermal modeling.

TESTING: CF ARCHITECTURAL HORIZONTAL INSULATED METAL WALL PANEL

| TEST/ APPROVAL | TEST METHOD | TEST TITLE | RESULTS |
|----------------------------|------------------|--|---|
| Fire US | ASTM E84 | Surface Burning Characteristics of Building Materials | Flame spread <25, smoke developed <450 |
| | ASTM E119 | Fire Endurance Tests of Building Construction Materials | One hour non-load bearing fire rating with two layers of Type X Gypsum Vertical or horizontal installation |
| | FM 4880 | Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels | Product approved (Exterior wall requires FM 4881, see Structural approvals) |
| | NFPA 259 | Test Method for Potential Heat of Building Materials | Potential heat of foam plastic insulation contained in the assembly tested in accordance with NFPA 285 |
| | NFPA 285-19 | Evaluation of Fire Propagation Characteristics of Exterior Non-Load Bearing Wall Assemblies | Panel assembly met the requirements of the standard |
| | NFPA 286 | Fire Tests for Evaluating Contribution of Wall and Ceiling Finish to Roof Fire Growth | Test specimen met the criteria of the IBC Section 803.1.2.1 |
| Fire Canada | CAN/ULC S101 | Fire Endurance Tests of Building Construction and Materials | One hour non-load bearing fire rating with two layers of Type X Gypsum |
| | CAN/ULC S101 | Fire Endurance Tests of Building Construction and Materials | Meets 15 minute stay-in-place requirements |
| | CAN/ULC S102 | Surface Burning Characteristics of Building Materials and Assemblies | Meets the National Building Code of Canada requirements |
| | CAN/ULC S134 | Fire Test of Exterior Wall Assemblies | Complies with the fire-spread and heat-flux limitations required by the National Building Code of Canada |
| | CAN/ULC S138 | Fire Growth of Insulated Building Panels in a Full-Scale Room Configuration | Met the criteria of the standard |
| Structural | ASTM E72 | Strength Tests of Panels for Building Construction | See Load Chart |
| | ASTM E1592 | Structural Performance of Metal Roof and Siding Systems by Uniform Static Air Pressure Differences | See Load Chart |
| | FM 4881 | Class 1 Exterior Wall Structural Performance | See FM Wall Load Chart (Interior wall requires FM 4880, see Fire approvals) |
| Thermal Performance | ASTM C518 | Steady-State Thermal Transmission Properties by Means of the Heat-Flow Meter Apparatus | K-Factor of 0.114 BTU.in/hr.ft ² .°F at 35° F mean core |
| | ASTM C1363 | Thermal Performance of Building Materials and Envelope Assemblies | See Thermal Performance Guide |
| Air Infiltration | ASTM E283 | Rate of Air Leakage Through Curtain Walls Under Specified Pressure Differences | <0.01 cfm/ft ² at 20 psf Vertical or horizontal installation |
| Water Infiltration | ASTM E331 | Water Penetration of Exterior Walls by Uniform Static Air Pressure Differences | No uncontrolled leakage when tested to a static pressure of 20 psf Vertical or horizontal installation |
| Special Approval | Miami-Dade NOA | Product Approval for City of Miami and Dade County | Product has City of Miami and Dade County Notice of Acceptance Vertical installation only |
| | State of Florida | Product Approval for the State of Florida | Product has State of Florida approval |

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metl-Span reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at metlspan.com.