


CF STAINLESS STEEL INSULATED METAL WALL PANEL

METL-SPAN® INSULATED METAL PANELS



The Metl-Span CF Stainless Steel insulated metal wall panel is recommended for the interior face of exterior walls and on both faces of partition walls in food processing areas, where panel faces are exposed to high pressure wash-down and chemical cleaners.

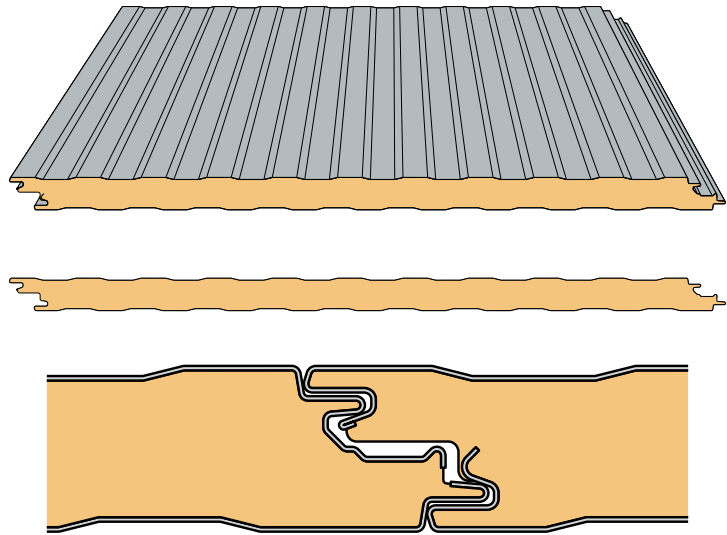

CF STAINLESS STEEL INSULATED METAL WALL PANEL FEATURES

Exterior Profile: Mesa nominal $\frac{1}{8}$ " deep;
Light Mesa nominal $\frac{1}{16}$ " deep

Interior Profile: Mesa nominal $\frac{1}{8}$ " deep; Light Mesa nominal $\frac{1}{16}$ " deep, *Light Mesa not available for 5- or 6-inch thick panels*

Panel Core: Foamed-in-place, zero ozone depleting (zero ODP) polyurethane, FM Class I approval.

Thermal Values: K-factor, Btu in/ft² hr. °F @ 75°F (24°C) mean core temperature = 0.140. K-factor, Btu in/ft² hr. °F @ 40°F (4°C) mean core temperature = 0.126.

Module Widths: 42", 44- $\frac{1}{2}$ "

Panel Thickness: 2", 2- $\frac{1}{2}$ ", 3", 4", 5", 6"

Panel Lengths: 8'-0" to 53'-0",

Faces: Stucco-embossed, Type 304 stainless steel

Panel Joint: Offset double tongue and groove with extended metal shelf for positive face fastening (*Note: The extended metal shelf is not available with the 44- $\frac{1}{2}$ " module width.*)

Fastening: Fastener and Clip concealed in the side joint

FM Approved Class I with no height restrictions.

FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

METL-SPAN: Pioneering Insulated Metal Panel Technology

1720 Lakepointe Drive, Suite #101, Lewisville, Texas 75057 • 877.585.9969 • FAX: 972.420.9382

metlspan.com • Visit our website or call us today for a free architectural catalog and CAD CD-ROM.

© 2010 Metl-Span LLC - A BlueScope Steel Company. All rights reserved. Printed in the U.S.A. METL-METL-11-046-1-CS