


# CF & CFI MESA & LIGHT MESA INSULATED METAL WALL PANEL

METL-SPAN INSULATED METAL PANELS



The Metl-Span CF & CFI Mesa and Light Mesa insulated metal wall panels are well suited for exterior and interior partition wall applications. The lightly corrugated profile on both faces of the panels ensures symmetry from outside of the building to inside, and from room to room in partition installations. The CF Mesa and Light Mesa wall panels may be used for exterior wall applications, but they are not recommended for use on exterior walls of low temperature buildings.

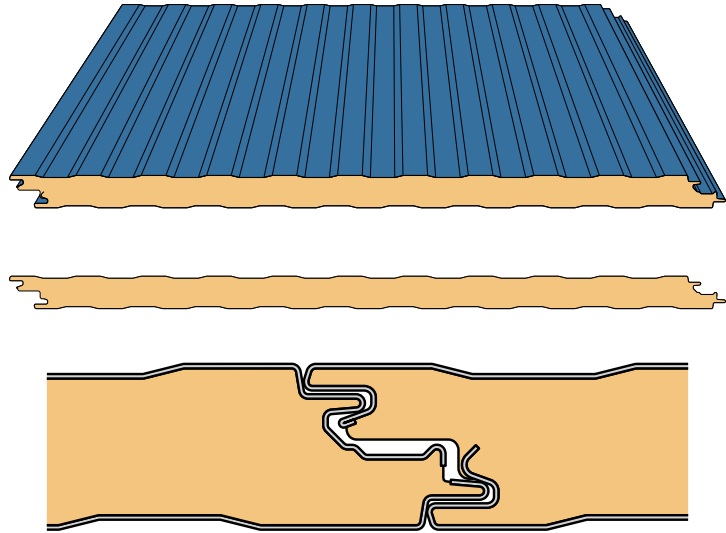

## CF & CFI MESA & LIGHT MESA INSULATED METAL WALL PANEL FEATURES

**Exterior Profile:** Mesa nominal  $\frac{1}{8}$ " deep;  
Light Mesa nominal  $\frac{1}{16}$ " deep

**Interior Profile:** Mesa nominal  $\frac{1}{8}$ " deep;  
Light Mesa nominal  $\frac{1}{16}$ " deep, *Light Mesa not available for 5- or 6-inch thick panels*

**Panel Core:** For the CF Panel: Foamed-in-place, zero ozone depleting (zero ODP) polyurethane, Factory Mutual Class I approval. For the CFI Panel: Foamed-in-place, zero ozone depleting (zero ODP) polyisocyanurate, Factory Mutual Class I approval.

**Thermal Values:** K-factor, Btu in/ft<sup>2</sup> hr. °F @ 75°F (24°C) mean core temperature = 0.140. K-factor, Btu in/ft<sup>2</sup> hr. °F @ 40°F (4°C) mean core temperature = 0.126.

**Module Widths:** For the CF panel: 36", 42";  
For the CFI panel: 42"

**Panel Thickness:** 2", 2  $\frac{1}{2}$ ", 3", 4", 5", 6"

CF Light Mesa: 2", 2  $\frac{1}{2}$ ", 3", 4"  
(2  $\frac{3}{4}$ " thickness also available from Nevada plant)

**Panel Lengths:** For the CF Panel: 8'-0" to 53'-0",  
For the CFI Panel: 8'-0" to 50'-0"

**Exterior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga. and 22 Ga.

**Interior Facings:** Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga., and 22 Ga.

**Panel Joint:** Offset double tongue and groove with extended metal shelf for positive face fastening

**Fastening:** Fastener and Clip concealed in the side joint

Factory Mutual Approved Class I with no height restrictions.

## FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

**METL-SPAN:** Pioneering Insulated Metal Panel Technology

1720 Lakepointe Drive, Suite #101, Lewisville, Texas 75057 • 877.585.9969 • FAX: 972.420.9382

[metlspan.com](http://metlspan.com) • Visit our website or call us today for a free architectural catalog and CAD CD-ROM.

© 2009 Metl-Span LLC - A BlueScope Steel Company. All rights reserved. Printed in the U.S.A. METL-09-08-037